

PLASTIC | WINDOW PROFILE SYSTEM PPR,HDPE PIPE MANUFACTURER




Ulaanbaatar, Bayangol district, 20kh khoroo TETS-4, 38/4

© 94006019, 94006006,94010203

□ Sales@metroplast.mn
 ⊕ www.metroplast.mn

Facebook.com/Metroplast.mn







PVC Window&Door Profile



About Company

We are plastic Manufacturer Company in Mongolia. Since 2011 starting research in plastic production field. Our plastic pipe production activity obtain PE, PP-R, PVC materials. We offering to our customer clean water pipes, sewege pipes with quality performance.

Products:

PVC Window Profile

- 60x60mm 3 chambers profile balconies, inner window
- 60x70mm 4 chambers window profile
- 70x70ìì 5 chambers window profile
- 11mm, 16mm, 19mm, 22mm, 36mm glass bead
- 60mm, 70 mm door PVC profile

Currently Our products produced according to MNS5874:2008 standard (PVC profile for window and door) using own formulation technology with capacity 1000 tons per year

Advantages:

Water separation capability
Lower heat loss
Standard of Germany
Modern designing
Noise isolation is better
Number want to take
The desired length available for order







PVC Window profile system 60mm*60mm


Currently Our products produced according to MNS5874:2008 standard (PVC profile for window and door) using own formulation technology with capacity 1000 tons per year.

Product detail:

Profile 60mm * 60mm

- 60mm x 60mm 3 chambers profile
- Color: White / 200 colors according to RAL /
- External walls width of 3 mm /MNS5874:2008 Class A /
- Internal walls widht of 2,5 mm
- Good thermal insulation 0.81
- Glass thickness: max 43 mm.

Хүрээ: Салхивч:

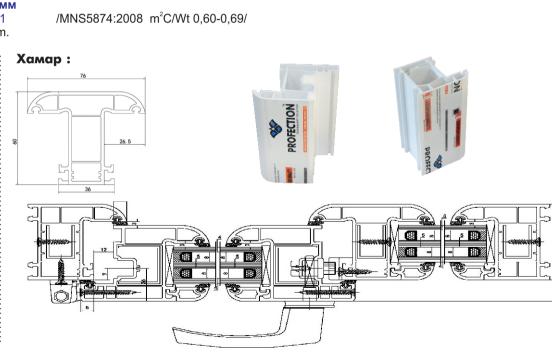



PVC Window profile system 60mm*70mm

Currently Our products produced according to MNS5874:2008 standard (PVC profile for window and door) using own formulation technology with capacity 1000 tons per year.

Product detail:

Profile 60mm * 70mm

- 60mm x 70mm 4 chambers profile
- Color : White / 200 colors according to RAL /
- External walls width of 3 mm
- Internal walls widht of 2.5 MM
- Good thermal insulation 0.81
- Glass thickness: max 43 mm.

/MNS5874:2008 Class A /

/MNS5874:2008 m²C/Wt 0,60-0,69/

Advantages:


Water separation capability
Lower heat loss
Standard of Germany
Modern designing
Noise isolation is better
Number want to take
The desired length available for order













PROFECTIO


Sash:



Mullion:



Door:



PVC Window profile system 70mm*70mm

Currently Our products produced according to MNS5874:2008 standard (PVC profile for window and door) using own formulation technology with capacity 1000 tons per year.


/MNS5874:2008 Class A /

Product detail:


Profile 70mm * 70mm

- 70mm x 70mm 5 chambers profile
- Color: White / 200 colors according to RAL /
- External walls width of 3 mm
- Internal walls widht of 2,5 MM
- Good thermal insulation 0,93
- /MNS5874:2008 m²C/Wt 0,60-0,69/
- Glass thickness: max 53 mm.


Хүрээ:




Салхивч:



Хамар:




Хаалга:







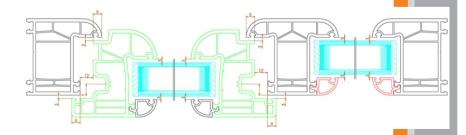



PROJECTS







